





standard dimensions & product selection

Nominal Shank Diameter	Allied Part Number	Shank Diameter A	Head Diameter B	Head Height C	Hole Dimensions		Max Clinch Allowance	Min. Work Hole
					D	E		
1/16	AA-060	.058-.061	.106-.112	.014-.018	.042-.044	.046	.038	.064
3/32	A-118	.085-.089	.142-.152	.020-.026	.061-.063	.064	.058	.096
3/32	B-166	.095-.099	.182-.192	.026-.032	.072-.074	.077	.065	.107
1/8	C-120	.118-.123	.213-.223	.030-.038	.086-.088	.095	.084	.129
1/8	C-420	.118-.123	.276-.286	.030-.038	.086-.088	.095	.084	.129
9/64	D-122	.141-.146	.229-.239	.030-.038	.103-.105	.126	.101	.156
9/64	D-322	.141-.146	.307-.317	.040-.050	.103-.105	.126	.101	.156
9/64	D-378	.141-.146	.307-.317	.040-.050	.103-.105	.250	.101	.156
5/32	K-122	.151-.156	.307-.317	.040-.050	.106-.108	.126	.109	.166
5/32	K-322	.151-.156	.370-.380	.058-.068	.106-.108	.126	.109	.166
3/16	E-110	.182-.188	.307-.317	.058-.068	.138-.140	.156	.129	.201
3/16	E-310	.182-.188	.370-.380	.058-.068	.138-.140	.156	.129	.201
1/4	G-140	.244-.252	.430-.444	.065-.075	.180-.182	.219	.164	.266
1/4	G-540	.244-.252	.495-.505	.073-.083	.180-.182	.219	.164	.266
5/16	H-140	.302-.310	.557-.567	.088-.098	.227-.229	.227	.203	.332
3/8	I-140	.370-.380	.745-.755	.151-.161	.279-.281	.281	.219	.390

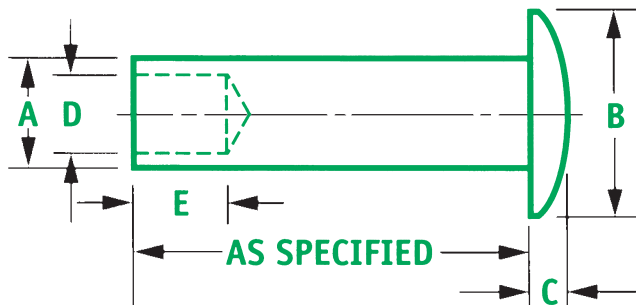

your ally for industry-leading rivet products and services

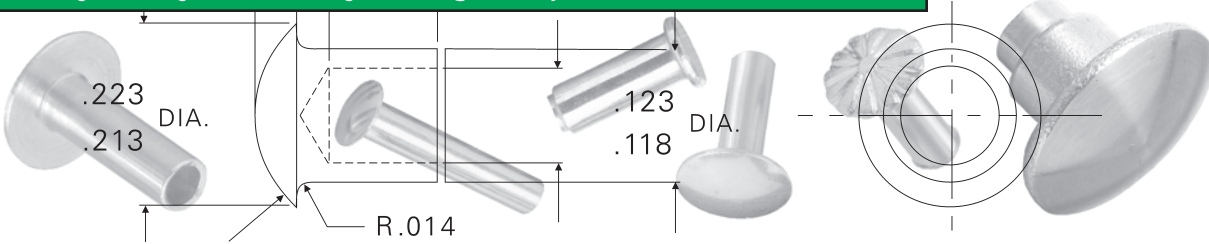

Allied Rivet, Inc.
 1172 Commerce Drive
 Geneva, IL 60134-2484
 Tel 630/208-0120
 Fax 630/208-0562
 Toll Free 1-800/22RIVET
 Email info@alliedrivet.com
www.alliedrivet.com